


NOTE:

1. CONCRETE FOR CURB SHALL BE
6-SACK MIX. SLUMP 1-1/2" - 3"

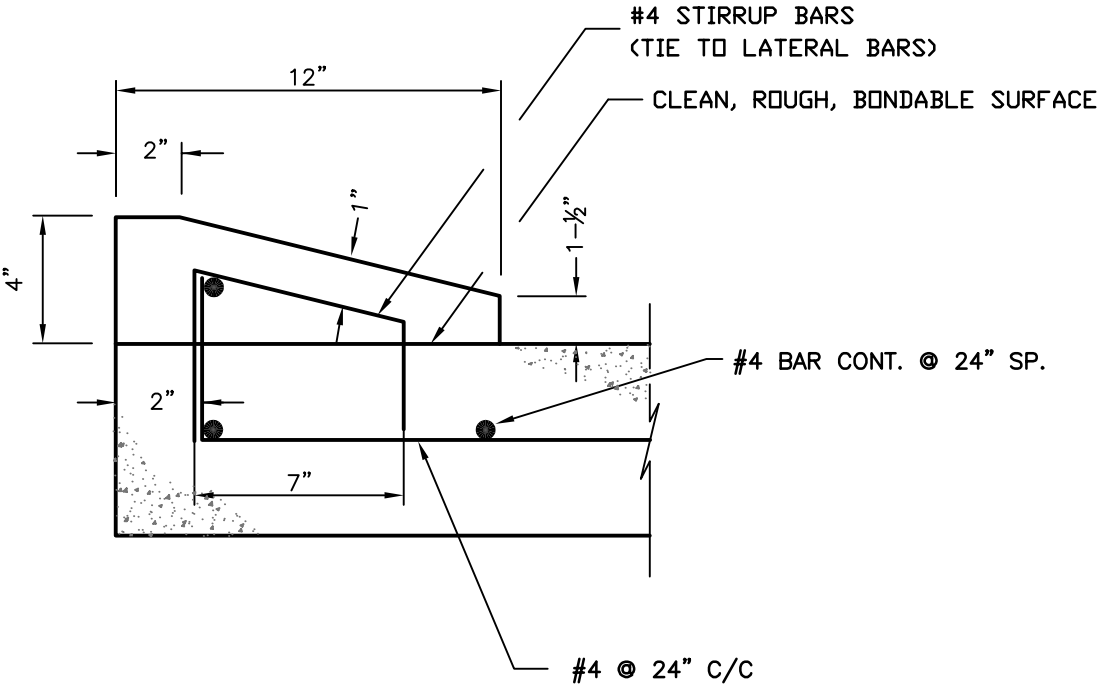

THE CITY OF ROSENBERG, FORT BEND COUNTY, TEXAS
DEPARTMENT OF PUBLIC WORKS

CONCRETE CURB
4"x12" APPLIED MOUNTABLE

| DESIGN: | CAD: | SCALE: | DATE: | DRAWING: |
|---------|-------|--------|-------|----------|
| CAK | STAFF | NTS | 12/10 | P-100b |