


JOINT SEAL, HOT POURED RUBBER ASPHALT
 (TEXAS S.D.H.P.T., ITEM 360.2 [8] CLASS 2)
 FLUSH WITH PAVEMENT SURFACE. ALL JOINT
 SEALANT SHALL BE INSTALLED IN STRICT
 ACCORDANCE WITH MANUFACTURER'S
 RECOMMENDATIONS.

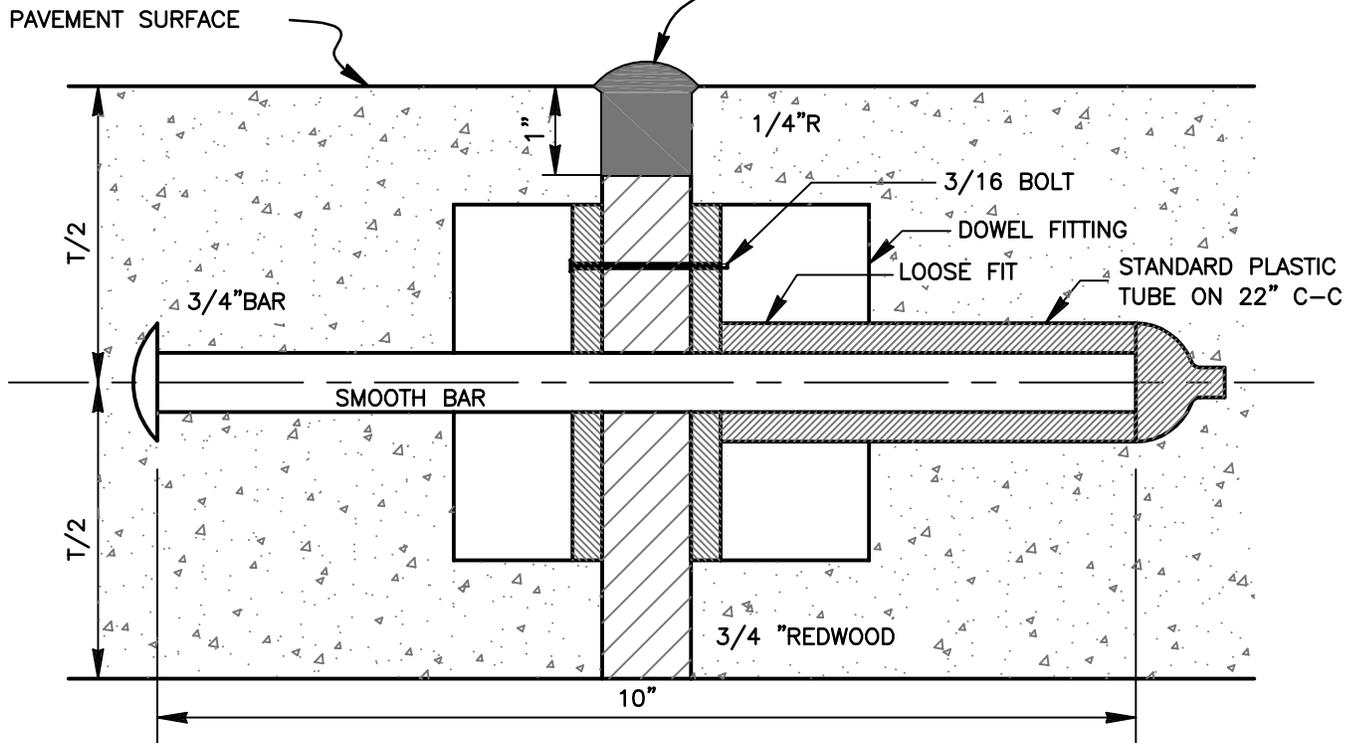

NOTES:

1. EXPANSION JOINT TO BE PLACED AT THE END OF EACH CURB RADIUS AND SPACED A MAXIMUM OF 60'-0" APART.
2. STAKES FOR TRANSVERSE JOINTS SHALL NOT BE PLACED CLOSER THAN 6" TO A LONGITUDINAL JOINT. THE TOP OF EACH STAKE SHALL NOT BE LESS THAN 1" BELOW THE FINISHED SURFACE.
3. ALTERNATIVE DOWEL IS A CANTILEVER TYPE, CAST MALLEABLE IRON LOAD TRANSMISSION UNIT, STAR-LUG, MODEL D-27, OR EQUAL, ON 22" C-C.

THE CITY OF ROSENBERG, FORT BEND COUNTY, TEXAS
 DEPARTMENT OF PUBLIC WORKS

DOWEL TYPE EXPANSION JOINT

DESIGN: CAK	CAD: STAFF	SCALE: NTS	DATE: 12/10	DRAWING: P-107
----------------	---------------	---------------	----------------	-------------------